

INTRODUCTION

Modern day electronic systems such as communication systems, data handling systems, missile and spacecraft tracking, and telemetry systems require time-of-day information for data correlation with time. Parallel and serial formatted time codes are used to efficiently interface the timing system (time-of-day source) to the user system. Parallel time codes are defined in IRIG Standard 205-87. Standardization of time codes is necessary to ensure system compatibility among the various ranges, ground tracking networks, spacecraft and missile projects, data reduction and processing facilities, and international cooperative projects.

This standard defines the characteristics of six serial time codes presently used by U.S. Government agencies and private industry. Four new combinations have been added to the list of standard formats: A002, A132, B002, and B122. Moreover, this standard reflects the state of the art and is not intended to constrain proposals for new serial time codes with greater resolution.

1.0 GENERAL DESCRIPTION OF STANDARD

This standard consists of a family of rate-scaled serial time codes with formats containing up to three-coded expressions or words. The first word of the time-code frame is time-of-year in binary coded decimal (BCD) notation in days, hours, minutes, seconds, and fractions of seconds depending on the code-frame rate. The second word is a set of bits reserved for encoding of various control, identification, and other special purpose functions. The third word is seconds-of-day weighted in straight binary seconds (SBS) notation.

Manufacturers of time code generating equipment today do not include the seconds-of-day code or the control bits in their design of IRIG serial time code generators. Fill bits of all 0s are added to achieve the desired frame length and code repetition rate. If the user desires the SBS code or control bits, it must be specified (see section 3 for standard code formats).

2.0 GENERAL DESCRIPTION OF FORMATS

An overview of the formats is described in the following subparagraphs.

2.1 Pulse Rise Time

The specified pulse (dc level shift bit) rise time shall be obtained between the 10 and 90 percent amplitude points (see appendix C).

2.2 Jitter

The modulated code is defined as ≤ 1 percent at the carrier frequency. The dc level shift code is defined as the pulse-to-pulse variation at the 50 percent amplitude points on the leading edges of successive pulses or bits (see appendix C).

2.3 Bit Rates and Index Count

Each pulse in a time code word/subword is called a bit. The "on-time" reference point for all bits is the leading edge of the bit. The repetition rate at which the bits occur is called the bit rate. Each bit has an associated numerical index count identification. The time interval between the leading edge of two consecutive bits is the index count interval. The index count begins at the frame reference point with index count 0 and increases one count each index count until the time frame is complete.

The bit rates and index count intervals of the time code formats are

Format	Bit Rate	Index Count Interval
A	1 kpps	1 millisecond
B	100 pps	10 milliseconds
D	1 ppm	1 minute
E	10 pps	0.1 second
G	10 kpps	0.1 millisecond
H	1 pps	1 second

2.4 Time Frame, Time Frame Reference, and Time Frame Rates

A time code frame begins with a frame reference marker P_0 (position identifier) followed by a reference bit P_R with each having a duration equal to 0.8 of the index count interval of the respective code. The on-time reference point of a time frame is the leading edge of the reference bit P_R . The repetition rate at which the time frames occur is called the time frame rate.

The time frame rates and time frame intervals of the formats are

Format	Time Frame Rate	Time Frame Interval
A	10 fps	0.1 second
B	1 fps	1 second
D	1 fph	1 hour
E	6 fpm	10 seconds
G	100 fps	10 ms
H	1 fpm	1 minute

2.5 Position Identifiers

Position identifiers have a duration equal to 0.8 of the index count interval of the respective code. The leading edge of the position identifier P_0 occurs one index count interval before the frame reference point P_R and the succeeding position identifiers ($P_2, P_2...P_0$) occur every succeeding tenth bit. The repetition rate at which the position identifiers occur is always 0.1 of the time format bit rate.

2.6 Time Code Words

The two time code words employed in this standard are

BCD time-of-year
SBS time-of-day (seconds-of-day)

All time code formats are pulse-width coded. A binary (1) bit has a duration equal to 0.5 of the index count interval, and a binary (0) bit has a duration equal to 0.2 of the index count interval. The BCD time-of-year code reads 0 hours, minutes, seconds, and fraction of seconds at 2400 each day and reads day 001 at 2400 of day 365 or day 366 (leap year). The SBS time-of-day code reads 0 seconds at 2400 each day excluding leap second days when a second may be added or subtracted. Coordinated Universal Time (UTC) is generated for all interrange applications.

2.7 BCD Time-of-Year Code Word

The BCD time-of-year code word consists of subwords in days, hours, minutes, seconds, and fractions of a second encoded in a binary representation ($1n\ 2n\ 4n\ 8n$) where $n=1, 10, 100, 1\ k\dots N$. Time code digit values less than N are considered zero and are encoded as a binary 0.

The position identifiers preceding the decimal digits and the index count locations of the decimal digits (if present) are

BCD Code Decimal Digits	Decimal Digits Follow Position Identifier	Digits Occupy Index Count Positions
Units of Seconds Tens of Seconds	P_0	1-4 6-8
Units of Minutes Tens of Minutes	P_1	10-13 15-17
Units of Hours Tens of Hours	P_2	20-23 25-26
Units of Days Tens of Days	P_2	30-33 35-38
Hundreds of Days Tenths of Seconds	P_4	40-41 45-48
Hundredths of Seconds	P_5	50-53

Format A and B include an optional straight binary seconds-of-day (SBS) time code word in addition to the BCD time-of-year time code word. The SBS word follows position identifier P₈ beginning with the least significant binary bit (2⁰) at index count 80 and progressing to the most significant binary bit (2¹⁶) at index count 97 with a position identifier P₉ occurring between the ninth (2⁸) and tenth (2⁹) binary bits.

2.8 Control Functions

All time code formats reserve a set of bits known as control functions (CF) for the encoding of various control, identification, or other special purpose functions. The control bits may be programmed in any predetermined coding system. A binary 1 bit has a duration equal to 0.5 of the index count interval, and a binary (0) has a duration equal to 0.2 of the index count interval. Control function bits follow position identifier P₅ or P₆ beginning at index count 50 or 60 with one control function bit per index count, excepting each tenth bit which is a position identifier. The number of available control bits in each time code format are

Format	Control Functions
A	27
B	27
D	9
E	45
G	36
H	9

Control functions are presently intended for intrarange use but not for interrange applications; therefore, no standard coding system exists. The inclusion of control functions into a time code format as well as the coding system employed is an individual user defined option.

2.9 Index Markers


Index markers occur at all index count positions which are not assigned as a reference marker, position identifier, code, or control function bit. Index marker bits have a duration equal to 0.2 of the index count interval of the respective time code format.

2.10 Amplitude Modulated Carrier

A standard sine wave carrier frequency to be amplitude modulated by a time code is synchronized to have positive-going, zero-axis crossings coincident with the leading edges of the modulating code bits. A mark-to-space ratio of 10:3 is standard with a range of 3:1 to 6:1 (see figure 1 and table 1, Typical Modulated Carrier Signals).

3.0 DETAILED DESCRIPTION OF FORMATS

The family of rate scaled serial time code formats is alphabetically designated A, B, D, E, G, and H. Various combinations of subwords and signal forms make up a time code word. All formats do not contain each standard coded expression, and various signal forms are possible. To differentiate between these forms, signal identification numbers are assigned to each permissible combination according to the following procedure:

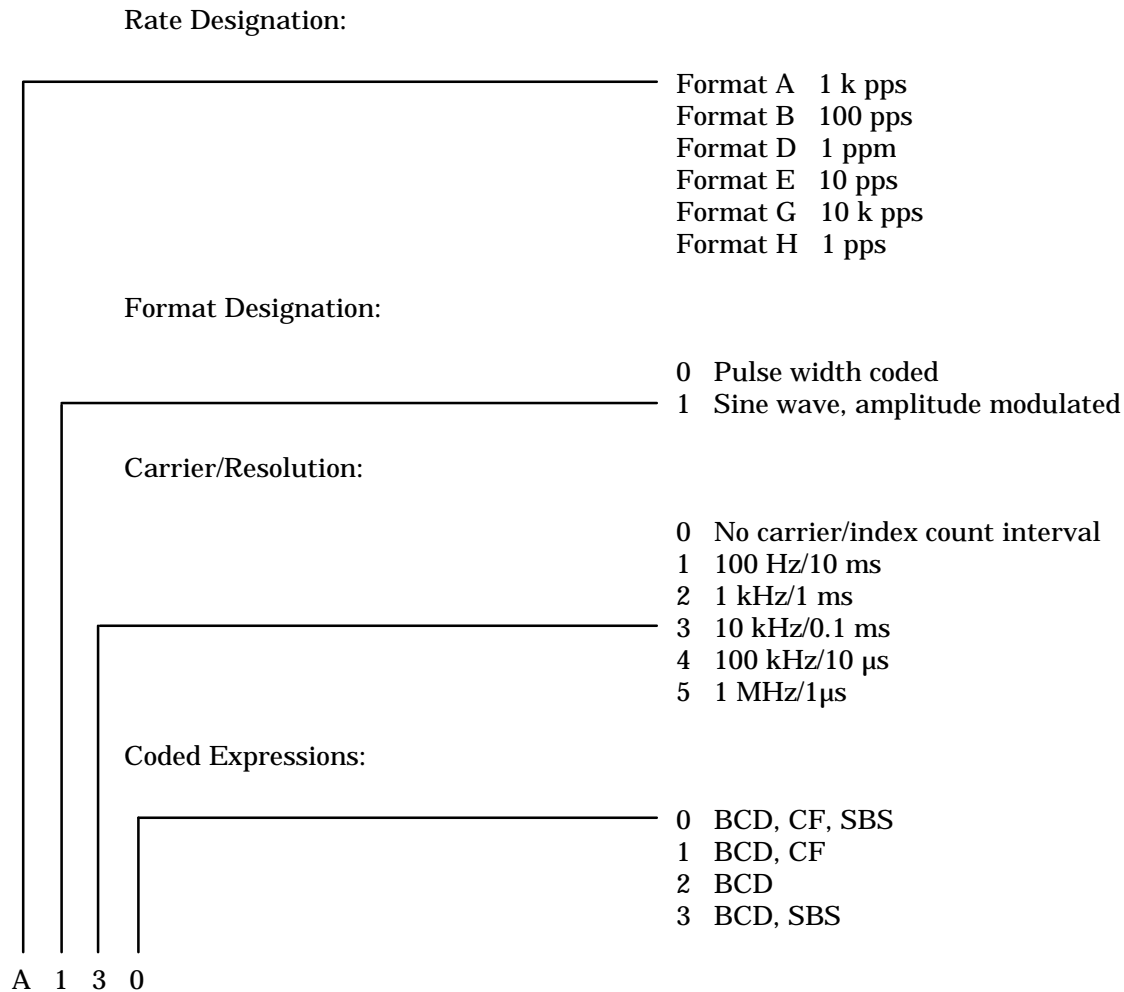

EXAMPLES:

Signal A 1 3 0 : Format A, amplitude modulated, 10 kHz carrier/0.1 ms resolution, containing BCD, CF, and SBS code expressions.

Signal B 0 0 3 : Format B, pulse-width coded, dc level shift/10 ms resolution, containing BCD and SBS code expressions.

Signal H 1 2 2 : Format H, amplitude modulated, 1 kHz carrier/1 ms resolution, containing BCD code expression.

When a coded expression is not present in a time code format, index marker bits occur in place of the absent expression's bits.

The following combination of signals are standard formats; no other combinations are standard:

Format A	Format B	Format D	Format E	Format G	Format H
A000	B000	D001	E001	G001	H001
*A002	*B002	D002	E002	G002	H002
A003	B003	D111	E111	G141	H111
A130	B120 †B150	D112	E112	G142	H112
*A132	*B122 †B152	D121	E121		H121
A133	B123 †B153	D122	E122		H122

* These four combinations have been added to the list of standard formats. These formats truncate after the BCD code word, replacing the control bits and straight binary seconds-of-day with index markers to complete the required frame length.

† These three combinations are modulated with 1 MHz.

4.0 GENERAL DESCRIPTION OF TIME CODES

A general description of individual time code formats is described in the following subparagraphs.

4.1 Time Code Format A

4.1.1 The 78-bit time code contains 34 bits of binary coded decimal (BCD) time-of-year information in days, hours, minutes, seconds, and tenths of seconds; 17 bits of straight binary seconds-of-day (SBS) and 27 bits for control functions.

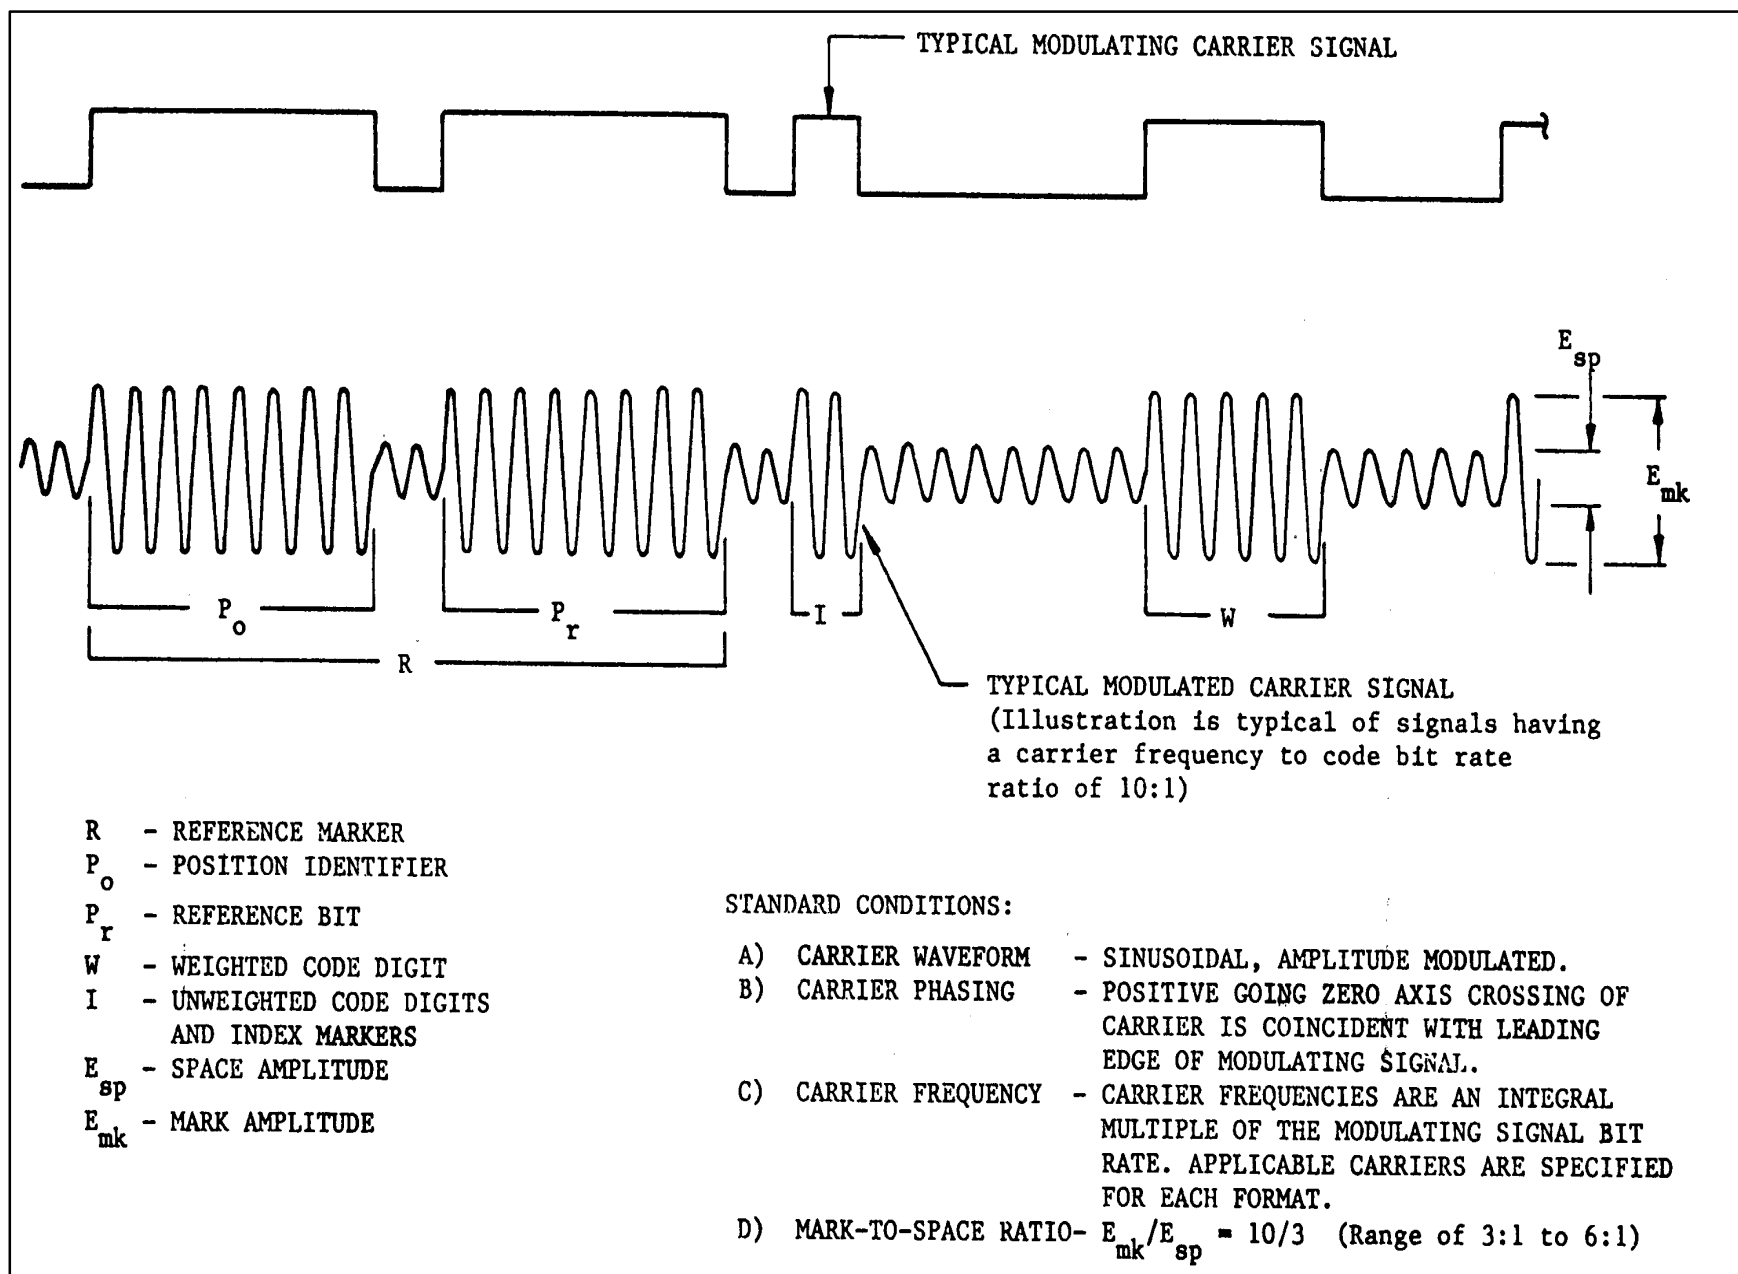


Figure 1. Typical modulated carrier signal.

TABLE 1. TYPICAL MODULATED CARRIER SIGNAL

					MARK INTERVAL NUMBER OF CYCLES			
FORMAT	SIGNAL NO.	TIME FRAME RATE	CARRIER FREQUENCY F	SIGNAL BIT RATE ER	RATIO F/ER	CODE "0" & INDEX	CODE "1"	POSITION IDENTIFIER & REF.
A	A130,132 133	10 per sec.	10 kHz	1 kpps	10:1	2	5	8
B	B120,122 123	1 per sec.	1 kHz	100 pps	10:1	2	5	8
D	D111, 112 121,122	1 per hr.	100 Hz 1 kHz	1 ppm 1 ppm	6000:1 60000:1	1200 12000	3000 30000	4800 48000
E	E111,112 121,122	6 per min.	100 Hz 1 kHz	10 pps 10 pps	10:1 100:1	2 20	5 50	8 80
G	G141,142	100 per sec.	100 kHz	10 kpps	10:1	2	5	8
H	H111,112 121,122	1 per min.	100 Hz 1 kHz	1 pps 1 pps	100:1 1000:1	20 200	50 500	80 800

4.1.2 The BCD code (seconds subword) begins at index count 1 (LSB first) with binary coded bits occurring between position identifiers P_0 and P_5 : 7 for seconds, 7 for minutes, 6 for hours, 10 for days, and 4 for tenths of seconds to complete the BCD word. An index marker occurs between the decimal digits in each subword, except for the tenths of seconds, to provide separation for visual resolution. The BCD time code word recycles yearly.

4.1.3 The SBS word begins at index count 80 and is between position identifiers P_8 and P_0 with a position identifier bit (P_9) between the 9th and 10th binary SBS coded bits. The SBS time code recycles each 24-hour period.

4.1.4 The control bits occur between position identifiers P_5 and P_8 with a position identifier occurring every 10 bits.

4.1.5 The frame rate or repetition rate is 0.1 second with resolutions of 1 ms (dc level shift) and 0.1 ms (modulated 10 kHz carrier).

4.2 Time Code Format B

4.2.1 The 74-bit time code contains 30 bits of BCD time-of-year information in days, hours, minutes, and seconds; 17 bits of SB seconds-of-day; and 27 bits for control functions.

4.2.2 The BCD code (seconds subword) begins at index count 1 (LSB first) with binary coded bits occurring between position identifier bits P_0 and P_5 : 7 for seconds, 7 for minutes, 6 for hours, and 10 for days, to complete the BCD word. An index marker occurs between the decimal digits in each subword to provide separation for visual resolution. The BCD time code recycles yearly.

4.2.3 The SBS word begins at index count 80 and is between position identifiers P_8 and P_0 with a position identifier bit (P_9) between the 9th and 10th binary SBS coded bits. The SBS time code recycles each 24 hour period.

4.2.4 The control bits occur between position identifiers P_5 and P_8 , with a position identifier every 10 bits.

4.2.5 The frame rate is 1.0 second with resolutions of 10 ms (dc level shift) and 1 ms (modulated 1 kHz carrier).

4.3 Time Code Format D

4.3.1 The 25-bit time code contains 16 bits of BCD time-of-year information in days, hours, and minutes, and 9 bits for control functions.

4.3.2 The BCD code (hours subword) begins at index count 20 (LSB first) with binary coded bits occurring between position identifier bits P_2 and P_5 : 6 for hours and 10 for days to complete the BCD word. An index marker occurs between the decimal digits in each subword for visual resolution. The time code recycles yearly.

4.3.3 The control bits occur between position identifiers P_5 and P_0 .

4.3.4 The frame rate is one hour with resolutions of 1 minute (dc level shift), 10 ms (modulated 100 Hz carrier) and 1 ms (modulated 1 kHz carrier).

4.4 Time Code Format E

4.4.1 The 71-bit time code contains 26 bits of BCD time-of-year information in days, hours, minutes, and seconds, and 45 bits for control functions.

4.4.2 The BCD code (seconds subword) begins at index count 6 (LSB first). Binary coded bits occur between position identifier bits P_0 and P_5 : 3 for tens of seconds, 7 for minutes, 6 for hours, and 10 for days to complete the BCD word. An index marker occurs between the decimal digits in each subword to provide for visual resolution. The time code recycles yearly.

4.4.3 The control bits occur between position identifiers P_5 and P_0 .

4.4.4 The frame rate is 10 seconds with resolutions of 0.1 second (dc level), 10 ms (modulated 100 Hz carrier) and 1 ms (modulated 1 kHz carrier). The time code recycles yearly.

4.5 Time Code Format G

4.5.1 The 74-bit time code contains 38 bits of BCD time-of-year information in days, hours, minutes, seconds, and fractions of seconds, and 36 bits for control functions.

4.5.2 The BCD code (seconds subword) begins at index count 1 (LSB first). Binary coded bits occur between position identifier bits P_0 and P_6 : 7 for seconds, 7 for minutes, 6 for hours, 10 for days, 4 for tenths of seconds, and 4 for hundredths of seconds to complete the BCD word. An index marker occurs between the decimal digits in each subword (except fractional seconds) to provide for resolution. The time code recycles yearly.

4.5.3 The control bits occur between position identifiers P_6 and P_0 .

4.5.4 The frame rate is 10 ms with resolutions of 0.1 ms (dc level shift) and 10 μ s (modulated 100 kHz carrier). The time code recycles yearly.

4.6 Time Code Format H

4.6.1 The 32-bit time code word contains 23 bits of BCD time-of-year information in days, hours, and minutes and 9 bits for control functions.

4.6.2 The BCD code (minutes subword) begins at index count 10 (LSB first) with binary coded bits occurring between position identifier bits P_1 and P_5 : 7 for minutes, 6 for hours, and 10 for days to complete the BCD word. An index marker occurs between decimal digits in each subword to provide separation for visual resolution. The time code recycles yearly.

4.6.3 The control bits occur between position identifiers P_5 and P_0 .

4.6.4 The frame rate is 1 minute with resolutions of 1 second (dc level shift), 10 ms (modulated 100 Hz carrier) and 1 ms (modulated 1 kHz carrier).

5.0 DETAILED DESCRIPTION OF TIME CODES

A detailed description of individual time code formats is described in the following paragraphs.

5.1 Format A, Signal A000

5.1.1 The beginning of each 0.1 second time frame is identified by two consecutive 0.8 ms bits, P_0 and P_r . The leading edge of P_r is the on-time reference point for the succeeding time code words. Position identifiers, P_0 and P_1 through P_9 , (0.8 ms duration) occur every 10th bit and 1 ms before the leading edge of each succeeding 100 pps "on-time" bit (see figure 2).

5.1.2 The two time code words and the control functions presented during the time frame are pulse width coded. The binary zero and index markers have a duration of 0.2 ms, and the binary one has a duration of 0.5 ms. The 1 k pps leading edge is the on-time reference point for all bits.

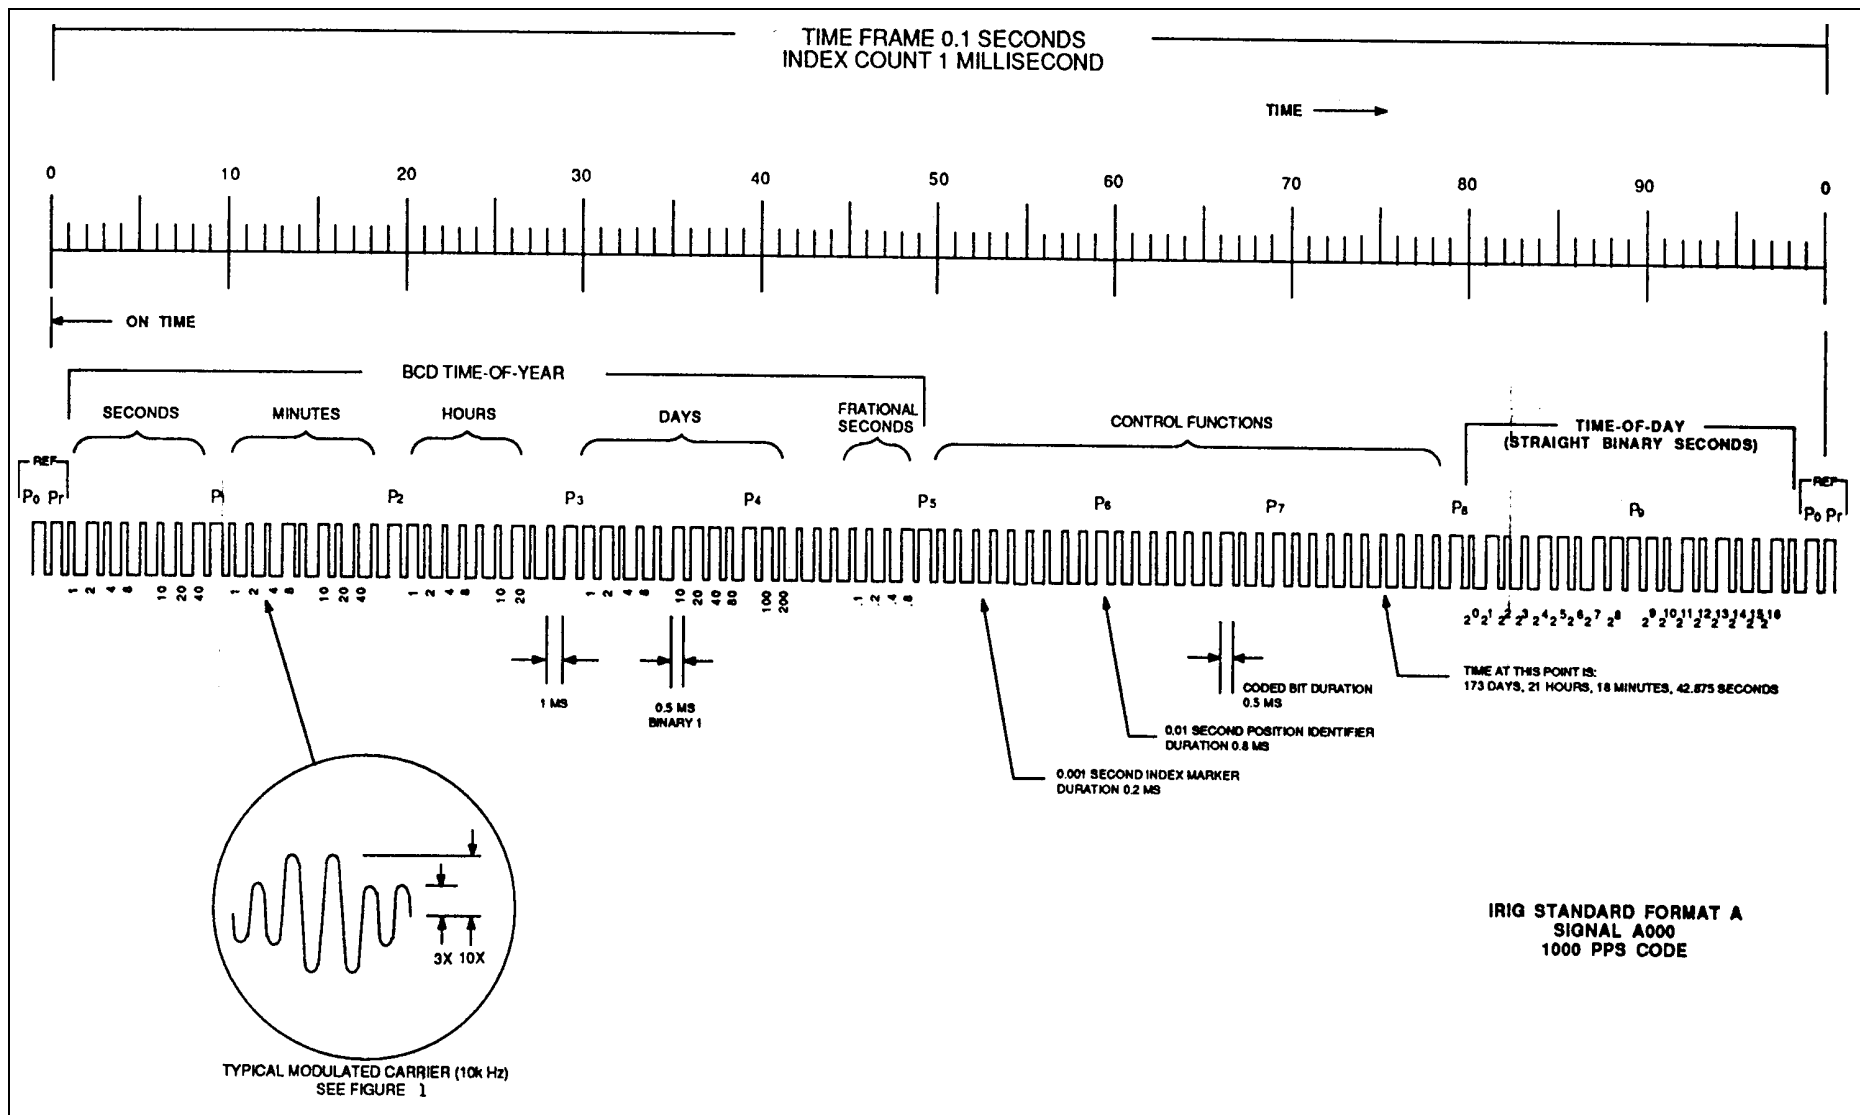


Figure 2. Format A: BCD time-of-year in days, hours, minutes, seconds, and fractions of seconds; straight binary seconds-of-day plus optional control bits.

5.1.3 The binary coded decimal (BCD) time-of-year code word consists of 34 bits beginning at index count one. The binary coded subword bits occur between position identifiers P_0 and P_5 : 7 for seconds, 7 for minutes, 6 for hours, 10 for days, and 4 for tenths of seconds to complete the time code word. An index marker occurs between the decimal digits in each subword, except tenths of seconds, to provide separation for visual resolution. The LSB occurs first except for the fractional seconds subword which follows the day-of-year subword. The BCD code recycles yearly. Each BCD bit position is identified on the time-of-year chart shown in table 2.

5.1.4 Twenty-seven control bits occur between position identifiers P_5 and P_8 . Any control function bit or combination of bits can be programmed to read a binary one or a binary zero during any specified number of time frames. Each control bit position is identified as shown in table 2.

5.1.5 The straight binary (SB) seconds-of-day code word occurs at index count 80 between position identifiers P_8 and P_0 . Seventeen bits give time-of-day in seconds with the LSB occurring first. A position identifier occurs between the 9th and 10th binary coded bits. The code recycles each 24-hour period. Each bit position is identified in table 2.

5.1.6

Pulse Rates	Pulse Duration
Bit rate: 1 k pps Position identifier rate: 100 pps Reference marker: 10 pps	Index marker: 0.2 ms Binary zero or uncoded bit: 0.2 ms Binary one or coded bit: 0.5 ms Position identifiers: 0.8 ms Reference bit: 0.8 ms

Resolution	Mark-To-Space Ratio
1 ms dc level 0.1 ms modulated 10 kHz carrier	Nominal value of 10:3 Range of 3:1 to 6:1

5.2 Format B, Signal B000

5.2.1 The beginning of each 1.0 second time frame is identified by two consecutive 8.0 ms bits, P_0 and P_r . The leading edge of P_r is the on-time reference point for the succeeding time code words. Position identifiers, P_0 and P_1 through P_9 , (8 ms duration) occur every 10th bit and 10 ms before the leading edge of each succeeding 10 pps "on-time" bit (see figure 3).

TABLE 2. FORMAT A,SIGNAL A000

BCD TIME-OF-YEAR CODE (34 DIGITS)

SECONDS SUBWORD			MINUTES SUBWORD			HOURS SUBWORD			DAYS AND FRACTIONAL SECOND SUBWORDS					
BCD Code Digit No.	Subword Digit Wt SECONDS	BIT Time (Note 1)	BCD Code Digit No.	Subword Digit Wt MINUTES	BIT Time	BCD Code Digit No.	Subword Digit Wt HOURS	BIT Time	BCD Code Digit No.	Subword Digit Wt DAYS	BIT Time	BCD Code Digit No.	Subword Digit Wt DAYS	BIT Time
Reference BIT		P _r	8	1	P _r + 10 ms	15	1	P _r + 20 ms	21	1	P _r + 30 ms	29	100	P _r + 40 ms
1	1	P _r + 1 ms	9	2	P _r + 11 ms	16	2	P _r + 21 ms	22	2	P _r + 31 ms	30	200	P _r + 41 ms
2	2	P _r + 2 ms	10	4	P _r + 12 ms	17	4	P _r + 22 ms	23	4	P _r + 32 ms	Index BIT		P _r + 42 ms
3	4	P _r + 3 ms	11	8	P _r + 13 ms	18	8	P _r + 23 ms	24	8	P _r + 33 ms	Index BIT		P _r + 43 ms
4	8	P _r + 4 ms	Index BIT		P _r + 14 ms	Index BIT		P _r + 24 ms	Index BIT		P _r + 34 ms	Index BIT		P _r + 44 ms
Index BIT		P _r + 5 ms	12	10	P _r + 15 ms	19	10	P _r + 25 ms	25	10	P _r + 35 ms	31	0.1	P _r + 45 ms
5	10	P _r + 6 ms	13	20	P _r + 16 ms	20	20	P _r + 26 ms	26	20	P _r + 36 ms	32	0.2	P _r + 46 ms
6	20	P _r + 7 ms	14	40	P _r + 17 ms	Index BIT		P _r + 27 ms	27	40	P _r + 37 ms	33	0.4	P _r + 47 ms
7	40	P _r + 8 ms	Index BIT		P _r + 18 ms	Index BIT		P _r + 28 ms	28	80	P _r + 38 ms	34	0.8	P _r + 48 ms
Position Ident. (P ₁)		P _r + 9 ms	Position Ident. (P ₂)		P _r + 19 ms	Position Ident. (P ₃)		P _r + 29 ms	Position Ident. (P ₄)		P _r + 39 ms	Position Ident. (P ₅)		P _r + 49 ms

CONTROL FUNCTIONS (27 BITS)

Control Function BIT	BIT Time	Control Function BIT	BIT Time	Control Function BIT	BIT Time
1	P _r + 50 ms	10	P _r + 60 ms	19	P _r + 70 ms
2	P _r + 51 ms	11	P _r + 61 ms	20	P _r + 71 ms
3	P _r + 52 ms	12	P _r + 62 ms	21	P _r + 72 ms
4	P _r + 53 ms	13	P _r + 63 ms	22	P _r + 73 ms
5	P _r + 54 ms	14	P _r + 64 ms	23	P _r + 74 ms
6	P _r + 55 ms	15	P _r + 65 ms	24	P _r + 75 ms
7	P _r + 56 ms	16	P _r + 66 ms	25	P _r + 76 ms
8	P _r + 57 ms	17	P _r + 67 ms	26	P _r + 77 ms
9	P _r + 58 ms	18	P _r + 68 ms	27	P _r + 78 ms
Position Ident. (P ₆)	P _r + 59 ms	Position Ident. (P ₇)	P _r + 69 ms	Position Ident. (P ₈)	P _r + 79 ms

STRAIGHT BINARY SECONDS TIME-OF-DAY CODE (17 DIGITS)

SB Code BIT	Subword Digit Weight	BIT Time	SB Code BIT	Subword Digit Weight	BIT Time
1	2 ⁰ = (1)	P _r + 80 ms	10	2 ⁹ = (512)	P _r + 90 ms
2	2 ¹ = (2)	P _r + 81 ms	11	2 ¹⁰ = (1024)	P _r + 91 ms
3	2 ² = (4)	P _r + 82 ms	12	2 ¹¹ = (2048)	P _r + 92 ms
4	2 ³ = (8)	P _r + 83 ms	13	2 ¹² = (4096)	P _r + 93 ms
5	2 ⁴ = (16)	P _r + 84 ms	14	2 ¹³ = (8192)	P _r + 94 ms
6	2 ⁵ = (32)	P _r + 85 ms	15	2 ¹⁴ = (16384)	P _r + 95 ms
7	2 ⁶ = (64)	P _r + 86 ms	16	2 ¹⁵ = (32768)	P _r + 96 ms
8	2 ⁷ = (128)	P _r + 87 ms	17	2 ¹⁶ = (65536)	P _r + 97 ms
9	2 ⁸ = (256)	P _r + 88 ms	Index BIT		P _r + 98 ms
Position Ident. (P ₉)		P _r + 89 ms	Position Ident. (P ₀)		P _r + 99 ms

Note 1: The BIT Time is the time of the BIT leading edge and refers to the leading edge of P_r.

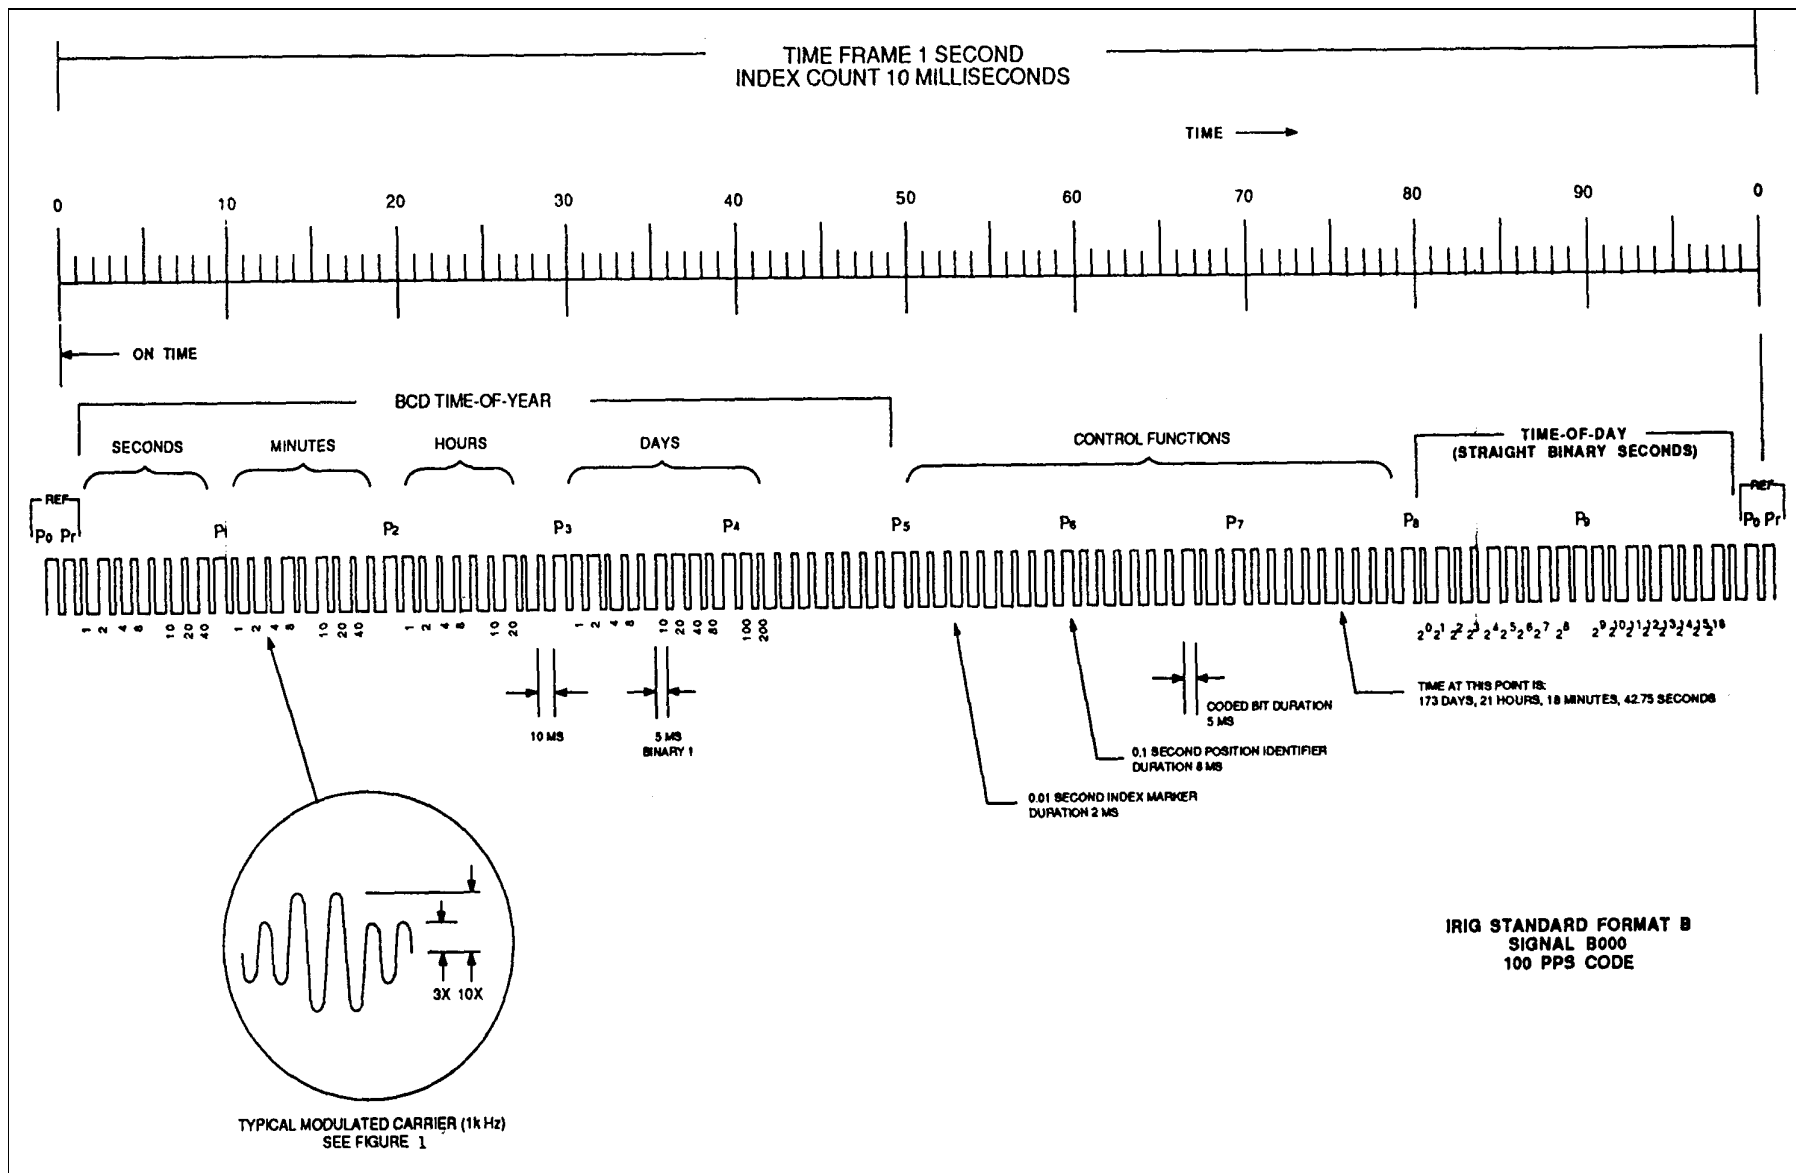


Figure 3. Format B: BCD time-of-year in days, hours, minutes and seconds; straight binary seconds-of-day plus optional control bits.

5.2.2 The two time code words and the control functions presented during the time frame are pulse width coded. The binary zero and the index markers have a duration of 2.0 ms, and a binary one has a duration of 5.0 ms. The 100 pps leading edge is the on-time reference point for all bits.

5.2.3 The BCD time-of-year code word consists of 30 bits beginning at index count one. The subword bits occur between position identifiers P₀ and P₅: 7 for seconds, 7 for minutes, 6 for hours, and 10 for days to complete the BCD time code word. An index marker occurs between the decimal digits in each subword to provide separation for visual resolution. The LSB occurs first. The code recycles yearly. Each bit position is identified in table 3.

5.2.4 Twenty-seven control functions occur between position identifiers P₅ and P₈. Any control function bit or combination of bits can be programmed to read a binary one or zero during any specified number of time frames. Each control bit position is identified in table 3.

5.2.5 The SB seconds-of-day code word occurs between position identifiers P₈ and P₀. Seventeen bits give time-of-day in seconds with the LSB occurring first. A position identifier occurs between the 9th and 10th binary coded bit. The code recycles each 24-hour period. Each bit position is identified as shown in table 3.

5.2.6

Pulse Rates	Pulse Duration
Bit rate: 100 pps Position identifier: 10 pps Reference mark: 1 pps	Index marker: 2 ms Binary zero or uncoded bit: 2 ms Binary one or coded bit: 5 ms Position identifiers: 8 ms Reference bit: 8 ms

Resolution	Mark-To-Space Ratio
10 ms dc level 1 ms modulated 1 kHz carrier	Nominal value of 10:3 Range of 3:1 to 6:1

TABLE 3. FORMAT B, SIGNAL B000

BCD TIME-OF-YEAR CODE (30 DIGITS)

SECONDS SUBWORD			MINUTES SUBWORD			HOURS SUBWORD			DAYS SUBWORD					
BCD Code Digit No.	Subword Digit Wt SECONDS	BIT Time (Note 1)	BCD Code Digit No.	Subword Digit Wt MINUTES	BIT Time	BCD Code Digit No.	Subword Digit Wt HOURS	BIT Time	BCD Code Digit No.	Subword Digit Wt DAYS	BIT Time	BCD Code Digit No.	Subword Digit Wt DAYS	BIT Time
Reference BIT		P _r	8	1	P _r + 100 ms	15	1	P _r + 200 ms	21	1	P _r + 300 ms	29	100	P _r + 400 ms
1	1	P _r + 10 ms	9	2	P _r + 110 ms	16	2	P _r + 210 ms	22	2	P _r + 310 ms	30	200	P _r + 410 ms
2	2	P _r + 20 ms	10	4	P _r + 120 ms	17	4	P _r + 220 ms	23	4	P _r + 320 ms	Index BIT		P _r + 420 ms
3	4	P _r + 30 ms	11	8	P _r + 130 ms	18	8	P _r + 230 ms	24	8	P _r + 330 ms	Index BIT		P _r + 430 ms
4	8	P _r + 40 ms	Index BIT		P _r + 140 ms	Index BIT		P _r + 240 ms	Index BIT		P _r + 340 ms	Index BIT		P _r + 440 ms
Index BIT		P _r + 50 ms	12	10	P _r + 150 ms	19	10	P _r + 250 ms	25	10	P _r + 350 ms	Index BIT		P _r + 450 ms
5	10	P _r + 60 ms	13	20	P _r + 160 ms	20	20	P _r + 260 ms	26	20	P _r + 360 ms	Index BIT		P _r + 460 ms
6	20	P _r + 70 ms	14	40	P _r + 170 ms	Index BIT		P _r + 270 ms	27	40	P _r + 370 ms	Index BIT		P _r + 470 ms
7	40	P _r + 80 ms	Index BIT		P _r + 180 ms	Index BIT		P _r + 280 ms	28	80	P _r + 380 ms	Index BIT		P _r + 480 ms
Position Ident. (P ₁)		P _r + 90 ms	Position Ident. (P ₂)		P _r + 190 ms	Position Ident. (P ₃)		P _r + 290 ms	Position Ident. (P ₄)		P _r + 390 ms	Position Ident. (P ₅)		P _r + 490 ms

CONTROL FUNCTIONS (27 BITS)

Control Function BIT	BIT Time	Control Function BIT	BIT Time	Control Function BIT	BIT Time
1	P _r + 500 ms	10	P _r + 600 ms	19	P _r + 700 ms
2	P _r + 510 ms	11	P _r + 610 ms	20	P _r + 710 ms
3	P _r + 520 ms	12	P _r + 620 ms	21	P _r + 720 ms
4	P _r + 530 ms	13	P _r + 630 ms	22	P _r + 730 ms
5	P _r + 540 ms	14	P _r + 640 ms	23	P _r + 740 ms
6	P _r + 550 ms	15	P _r + 650 ms	24	P _r + 750 ms
7	P _r + 560 ms	16	P _r + 660 ms	25	P _r + 760 ms
8	P _r + 570 ms	17	P _r + 670 ms	26	P _r + 770 ms
9	P _r + 580 ms	18	P _r + 680 ms	27	P _r + 780 ms
Position Ident. (P ₆)	P _r + 590 ms	Position Ident. (P ₇)	P _r + 690 ms	Position Ident. (P ₈)	P _r + 790 ms

STRAIGHT BINARY SECONDS TIME-OF-DAY CODE (17 DIGITS)

SB Code BIT	Subword Digit Weight	BIT Time	SB Code BIT	Subword Digit Weight	BIT Time
1	2 ⁰ = (1)	P _r + 800 ms	10	2 ⁹ = (512)	P _r + 900 ms
2	2 ¹ = (2)	P _r + 810 ms	11	2 ¹⁰ = (1024)	P _r + 910 ms
3	2 ² = (4)	P _r + 820 ms	12	2 ¹¹ = (2048)	P _r + 920 ms
4	2 ³ = (8)	P _r + 830 ms	13	2 ¹² = (4096)	P _r + 930 ms
5	2 ⁴ = (16)	P _r + 840 ms	14	2 ¹³ = (8192)	P _r + 940 ms
6	2 ⁵ = (32)	P _r + 850 ms	15	2 ¹⁴ = (16384)	P _r + 950 ms
7	2 ⁶ = (64)	P _r + 860 ms	16	2 ¹⁵ = (32768)	P _r + 960 ms
8	2 ⁷ = (128)	P _r + 870 ms	17	2 ¹⁶ = (65536)	P _r + 970 ms
9	2 ⁸ = (256)	P _r + 880 ms	Index BIT		P _r + 980 ms
Position Ident. (P ₉)		P _r + 890 ms	Position Ident. (P ₀)		P _r + 990 ms

Note 1: The BIT Time is the time of the BIT leading edge and refers to the leading edge of P_r

5.3 Format D, Signal D001

5.3.1 The beginning of each 2-hour time frame is identified by two consecutive 48-second bits, P_0 and P_r . The leading edge of P_r is the on-time point for the succeeding time code word. Position identifiers, P_0 and P_1 through P_5 , occur every 10th bit and one minute before the leading edge of each succeeding 6 pph on-time bit (see figure 4).

5.3.2 The time code word and the control bits presented during the time frame are pulse width coded. The binary zero and the index markers have a duration of 12 seconds and the binary one has a duration of 30 seconds. The 1 ppm leading edge is the on-time reference point for all bits.

5.3.3 The BCD time-of-year code consists of 16 bits beginning at index count 20. The subword bits occur between position identifiers P_2 and P_5 : 6 for hours and 10 for days to complete the time code word. An index marker occurs between the decimal digits in each subword to provide separation for visual resolution. The LSB occurs first. The code recycles yearly. Each bit position is identified in table 4.

5.3.4 Nine control bits occur between position identifiers P_5 and P_0 . Any control function bit or combination of bits can be programmed to read a binary one or zero during any specified number of time frames. Each control bit position is identified in table 4.

5.3.5

Pulse Rate	Pulse Duration
Bit rate: 1 ppm Position identifiers: 6 pph Reference mark: 1 pph	Index marker: 12 s Binary zero or uncoded bit: 12 s Binary one or coded bit: 30 s Position identifiers: 48 s Reference bit: 48 s

Resolution	Mark-To-Space Ratio
1 m dc level 10 ms modulated 100 Hz carrier 1 ms modulated 1 kHz carrier	Nominal value of 10:1 Range of 3:1 to 6:1

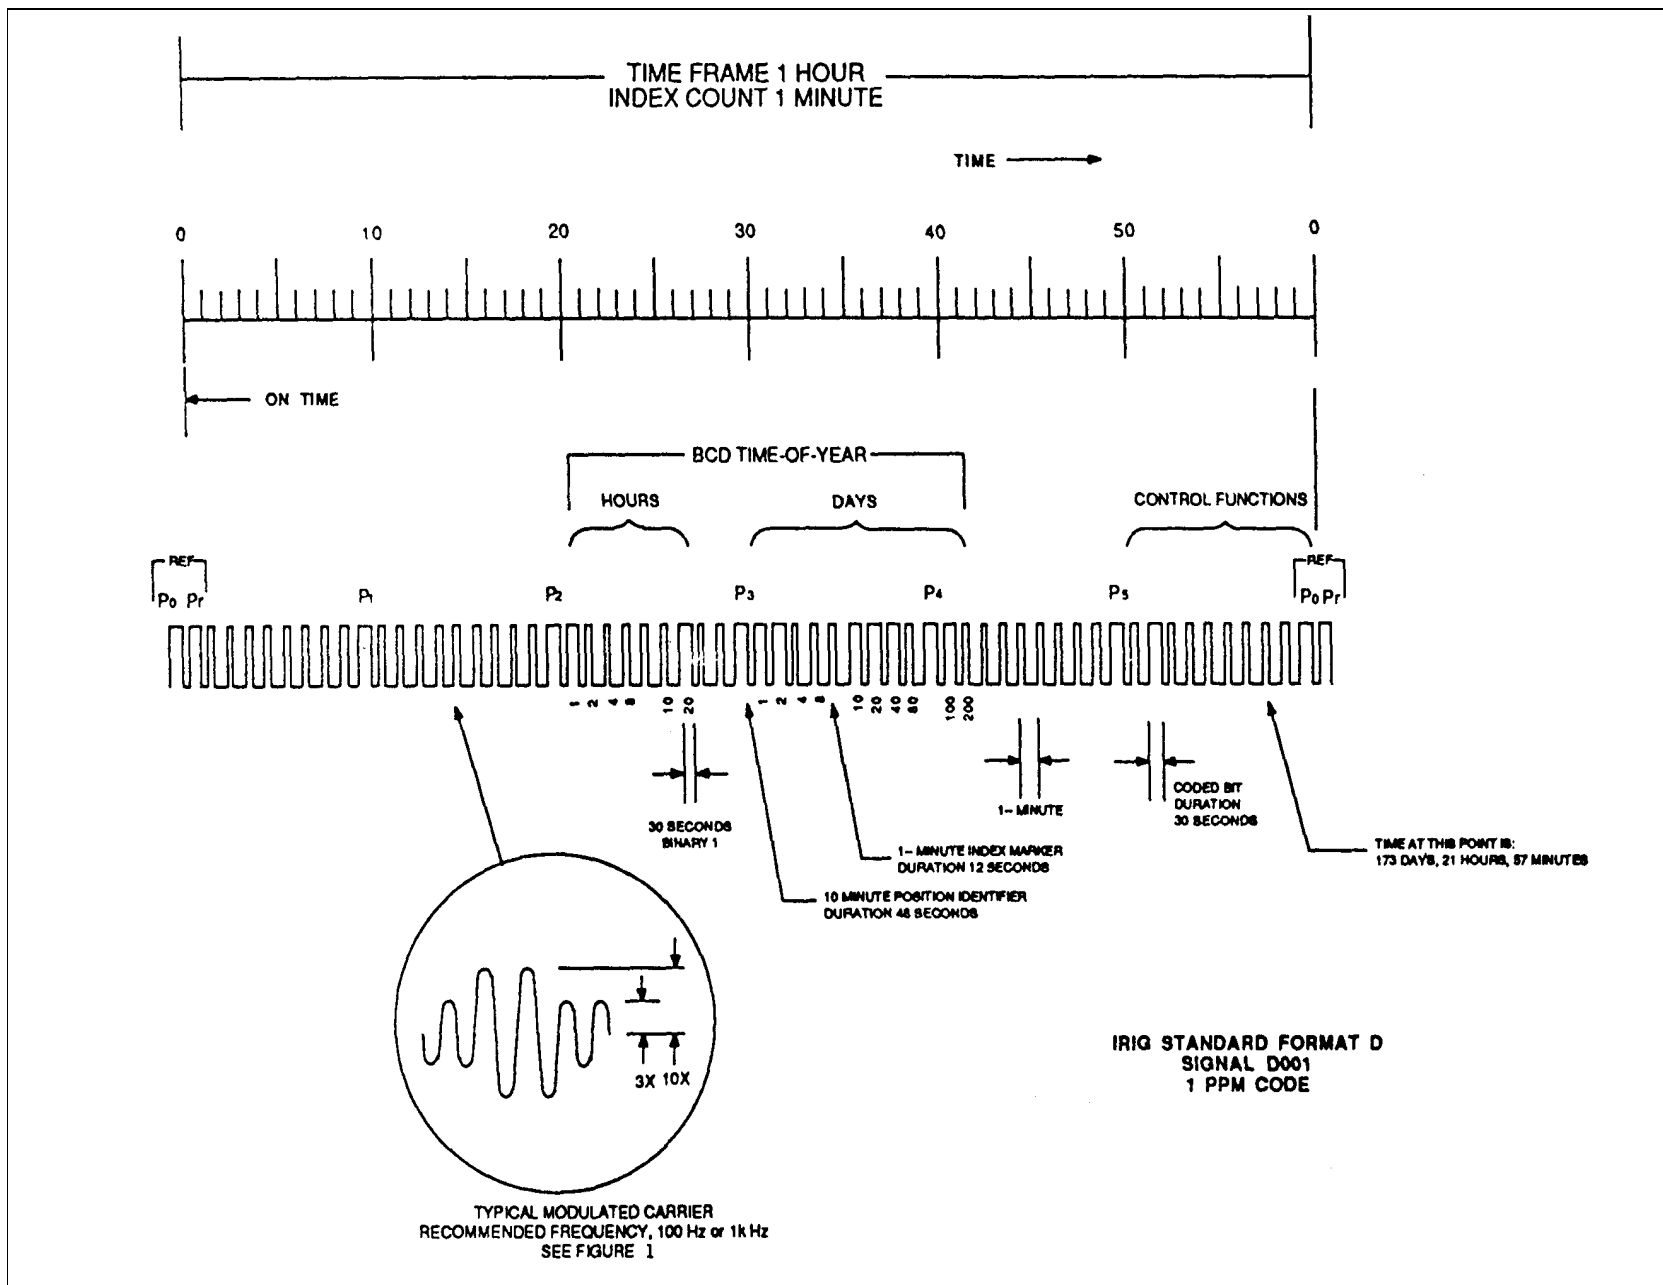


Figure 4. Format D: BCD time-of-year in days and hours plus optional control bits.

TABLE 4. FORMAT D, SIGNAL D001

BCD TIME-OF-YEAR CODE (16 DIGITS)

MINUTES SUBWORD			HOURS SUBWORD			DAYS SUBWORD								
BCD Code Digit No.	Subword Digit Wt MINUTES	BIT Time (Note 1)	BCD Code Digit No.	Subword Digit Wt MINUTES	BIT Time	BCD Code Digit No.	Subword Digit Wt HOURS	BIT Time	BCD Code Digit No.	Subword Digit Wt DAYS	BIT Time	BCD Code Digit No.	Subword Digit Wt DAYS	BIT Time
Reference BIT		P _r	Index Marker		P _r + 10 min	1	1	P _r + 20 min	7	1	P _r + 30 min	15	100	P _r + 40 min
Index Marker		P _r + 1 min	Index Marker		P _r + 11 min	2	2	P _r + 21 min	8	2	P _r + 31 min	16	200	P _r + 41 min
Index Marker		P _r + 2 min	Index Marker		P _r + 12 min	3	4	P _r + 22 min	9	4	P _r + 32 min	Index Marker		P _r + 42 min
Index Marker		P _r + 3 min	Index Marker		P _r + 13 min	4	8	P _r + 23 min	10	8	P _r + 33 min	Index Marker		P _r + 43 min
Index Marker		P _r + 4 min	Index Marker		P _r + 14 min	Index Marker		P _r + 24 min	Index BIT		P _r + 34 min	Index Marker		P _r + 44 min
Index Marker		P _r + 5 min	Index Marker		P _r + 15 min	5	10	P _r + 25 min	11	10	P _r + 35 min	Index Marker		P _r + 45 min
Index Marker		P _r + 6 min	Index Marker		P _r + 16 min	6	20	P _r + 26 min	12	20	P _r + 36 min	Index Marker		P _r + 46 min
Index Marker		P _r + 7 min	Index Marker		P _r + 17 min	Index Marker		P _r + 27 min	13	40	P _r + 37 min	Index Marker		P _r + 47 min
Index Marker		P _r + 8 min	Index Marker		P _r + 18 min	Index Marker		P _r + 28 min	14	80	P _r + 38 min	Index Marker		P _r + 48 min
Position Ident. (P ₁)		P _r + 9 min	Position Ident. (P ₂)		P _r + 19 min	Position Ident. (P ₃)		P _r + 29 min	Position Ident. (P ₄)		P _r + 39 min	Position Ident. (P ₅)		P _r + 49 min

CONTROL FUNCTIONS (9 BITS)	
Control Function BIT	BIT Time
1	P _r + 50 min
2	P _r + 51 min
3	P _r + 52 min
4	P _r + 53 min
5	P _r + 54 min
6	P _r + 55 min
7	P _r + 56 min
8	P _r + 57 min
9	P _r + 58 min
Position Ident. (P ₀)	P _r + 59 min

Note 1: The BIT Time is the time of the BIT leading edge and refers to the leading edge of P_r

5.4 Format E, Signal E001

5.4.1 The beginning of each 10 second time frame is identified by two consecutive 80 ms bits, P_0 and P_r . The leading edge of P_r is the on-time reference point for the succeeding time code. Position identifiers, P_0 and P_1 through P_9 , occur every 10th bit and 0.1 seconds before the leading edge of each succeeding 1 pps on-time bit (see figure 5).

5.4.2 The time code word and control functions presented during the timeframe are pulse width coded. The binary zero and index markers have a duration of 20 ms, and the binary one has a duration of 50 ms. The 10 pps leading edge is the on-time reference point for all bits.

5.4.3 The BCD time-of year code word consists of 26 bits beginning at index count 6. The code subword bits occur between position identifiers P_0 and P_5 : 3 for seconds, 7 for minutes, 6 for hours, and 10 for days, to complete the time code word. An index marker occurs between the decimal digits in each subword to provide separation for visual resolution. The LSB occurs first. The code recycles yearly. Each bit position is identified in table 5.

5.4.4 Forty-five control functions occur between position identifiers P_5 and P_0 . Any control function bit or combination of bits can be programmed to read a binary one or zero during any specified number of time frames. Each control bit position is identified in table 5.

5.4.5

Pulse Rate	Pulse Duration
Bit rate: 10 pps Position identifier: 1 pps Reference mark: 6 ppm	Index marker: 20 ms Binary zero or uncoded bit: 20 ms Binary one or coded bit: 50 ms Position identifier: 80 ms Reference bit: 80 ms

Resolution	Mark-To-Space Ratio
0.1 s dc level 10 ms modulated 100 kHz carrier 1 ms modulated 1 kHz carrier	Nominal value of 10:3 Range of 3:1 to 6:1

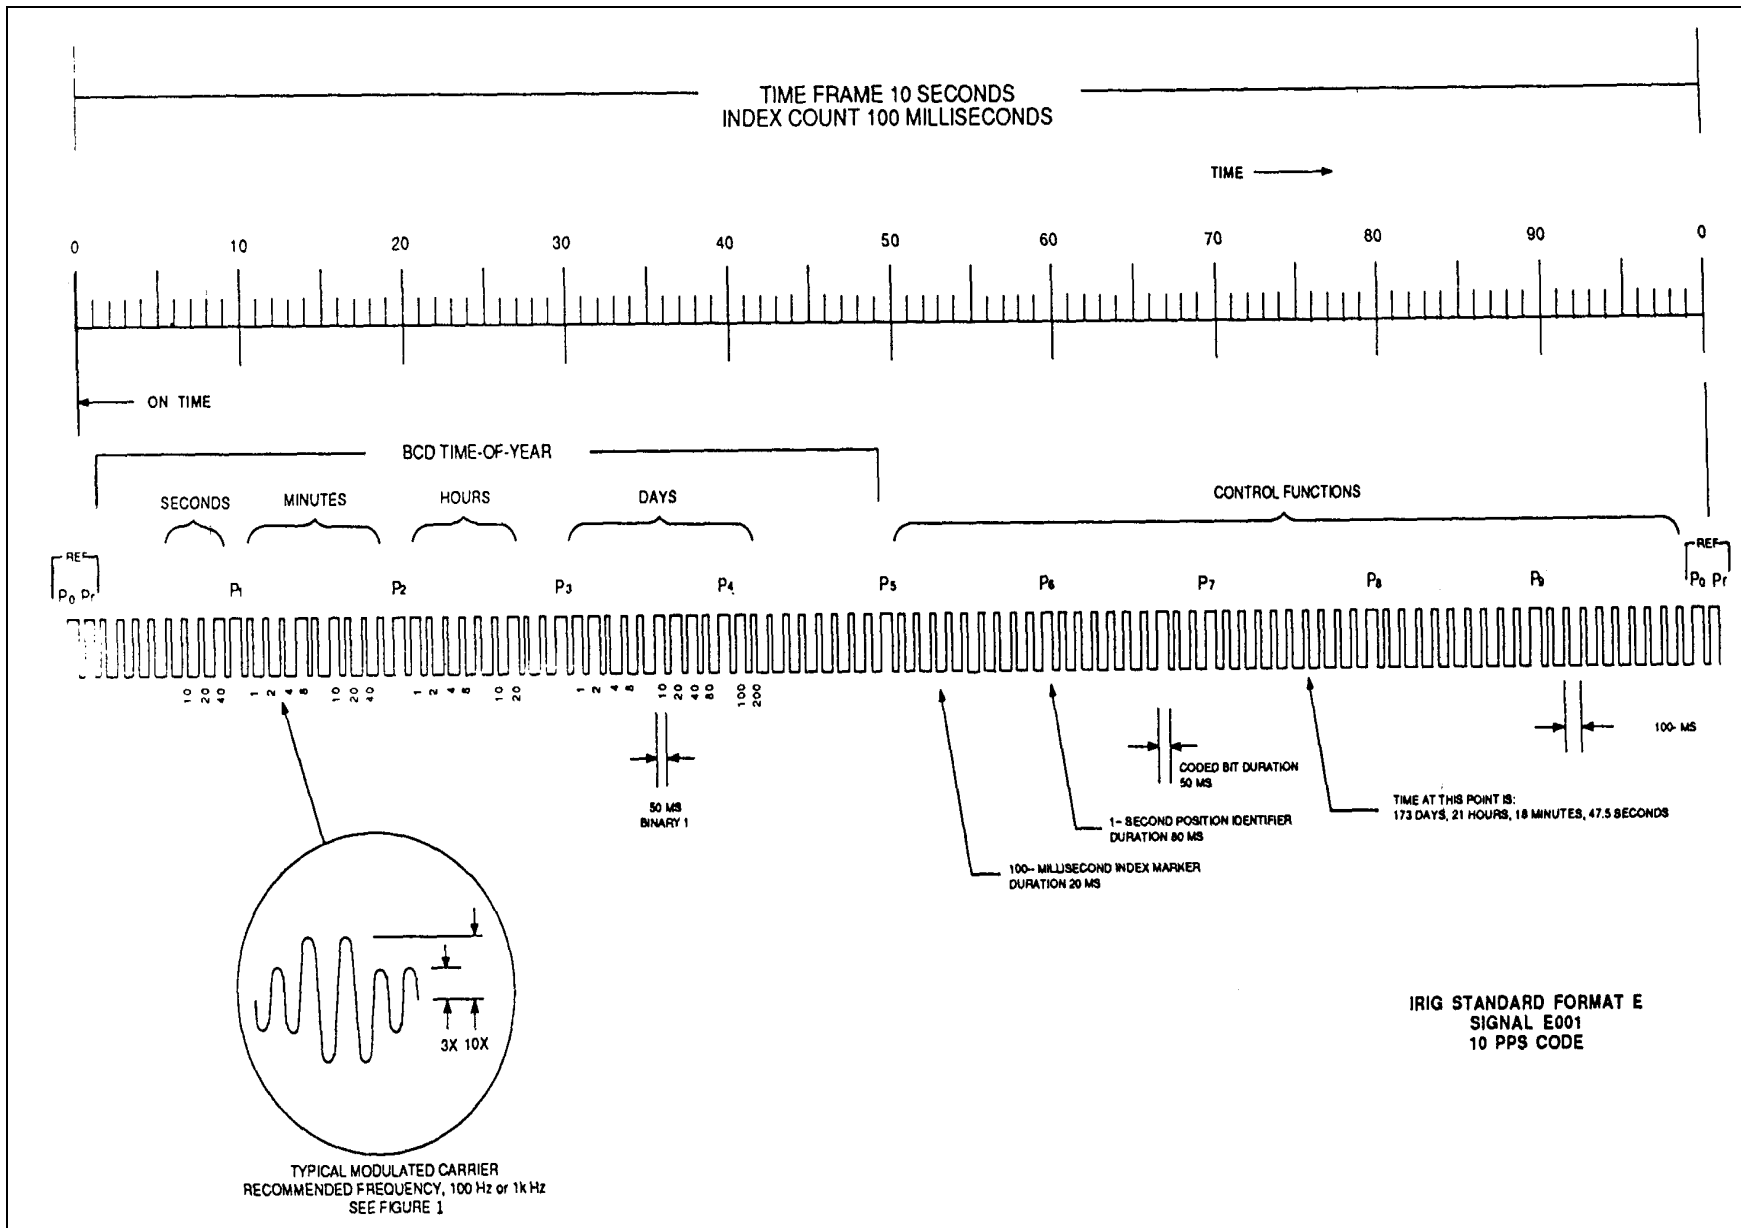


Figure 5. Format E: BCD time-of-year in days, hours, minutes and seconds plus optional control bits.

TABLE 5. FORMAT E, SIGNAL E001

BCD TIME-OF-YEAR CODE (26 DIGITS)														
SECONDS SUBWORD			MINUTES SUBWORD			HOURS SUBWORD			DAYS SUBWORD					
BCD Code Digit No.	Subword Digit Wt SECONDS	BIT Time (Note 1)	BCD Code Digit No.	Subword Digit Wt MINUTES	BIT Time	BCD Code Digit No.	Subword Digit Wt HOURS	BIT Time	BCD Code Digit No.	Subword Digit Wt DAYS	BIT Time	BCD Code Digit No.	Subword Digit Wt DAYS	BIT Time
Reference BIT		P _r	4	1	P _r + 1.0 sec	11	1	P _r + 2.0 sec	17	1	P _r + 3.0 sec	25	100	P _r + 4.0 sec
Index Marker		P _r + 0.1 sec	5	2	P _r + 1.1 sec	12	2	P _r + 2.1 sec	18	2	P _r + 3.1 sec	26	200	P _r + 4.1 sec
Index Marker		P _r + 0.2 sec	6	4	P _r + 1.2 sec	13	4	P _r + 2.2 sec	19	4	P _r + 3.2 sec	Index Marker		P _r + 4.2 sec
Index Marker		P _r + 0.3 sec	7	8	P _r + 1.3 sec	14	8	P _r + 2.3 sec	20	8	P _r + 3.3 sec	Index Marker		P _r + 4.3 sec
Index Marker		P _r + 0.4 sec	Index Marker		P _r + 1.4 sec	Index Marker		P _r + 2.4 sec	Index Marker		P _r + 3.4 sec	Index Marker		P _r + 4.4 sec
Index Marker		P _r + 0.5 sec	8	10	P _r + 1.5 sec	15	10	P _r + 2.5 sec	21	10	P _r + 3.5 sec	Index Marker		P _r + 4.5 sec
1	10	P _r + 0.6 sec	9	20	P _r + 1.6 sec	16	20	P _r + 2.6 sec	22	20	P _r + 3.6 sec	Index Marker		P _r + 4.6 sec
2	20	P _r + 0.7 sec	10	40	P _r + 1.7 sec	Index Marker		P _r + 2.7 sec	23	40	P _r + 3.7 sec	Index Marker		P _r + 4.7 sec
3	40	P _r + 0.8 sec	Index Marker		P _r + 1.8 sec	Index Marker		P _r + 2.8 sec	24	80	P _r + 3.8 sec	Index Marker		P _r + 4.8 sec
Position Ident. (P ₁)		P _r + 0.9 sec	Position Ident. (P ₂)		P _r + 1.9 sec	Position Ident. (P ₃)		P _r + 2.9 sec	Position Ident. (P ₄)		P _r + 3.9 sec	Position Ident. (P ₅)		P _r + 4.9 sec

CONTROL FUNCTIONS (45 BITS)									
Control Function BIT	BIT Time	Control Function BIT	BIT Time	Control Function BIT	BIT Time	Control Function BIT	BIT Time	Control Function BIT	BIT Time
1	P _r + 5.0 sec	10	P _r + 6.0 sec	19	P _r + 7.0 sec	28	P _r + 8.0 sec	37	P _r + 9.0 sec
2	P _r + 5.1 sec	11	P _r + 6.1 sec	20	P _r + 7.1 sec	29	P _r + 8.1 sec	38	P _r + 9.1 sec
4	P _r + 5.2 sec	12	P _r + 6.2 sec	21	P _r + 7.2 sec	30	P _r + 8.2 sec	39	P _r + 9.2 sec
3	P _r + 5.3 sec	13	P _r + 6.3 sec	22	P _r + 7.3 sec	31	P _r + 8.3 sec	40	P _r + 9.3 sec
5	P _r + 5.4 sec	14	P _r + 6.4 sec	23	P _r + 7.4 sec	32	P _r + 8.4 sec	41	P _r + 9.4 sec
6	P _r + 5.5 sec	15	P _r + 6.5 sec	24	P _r + 7.5 sec	33	P _r + 8.5 sec	42	P _r + 9.5 sec
7	P _r + 5.6 sec	16	P _r + 6.6 sec	25	P _r + 7.6 sec	34	P _r + 8.6 sec	43	P _r + 9.6 sec
8	P _r + 5.7 sec	17	P _r + 6.7 sec	26	P _r + 7.7 sec	35	P _r + 8.7 sec	44	P _r + 9.7 sec
9	P _r + 5.8 sec	18	P _r + 6.8 sec	27	P _r + 7.8 sec	36	P _r + 8.8 sec	45	P _r + 9.8 sec
Position Ident. (P ₆)	P _r + 5.9 sec	Position Ident. (P ₇)	P _r + 6.9 sec	Position Ident. (P ₈)	P _r + 7.9 sec	Position Ident. (P ₉)	P _r + 8.9 sec	Position Ident. (P ₀)	P _r + 9.9 sec

Note 1: The BIT Time is the time of the BIT leading edge and refers to the leading edge of P_r

5.5 Format G, Signal G001

5.5.1 The beginning of each 0.01 second time frame is identified by two consecutive 80 μ s bits, P_0 and P_r . The leading edge of P_r is the on-time reference point for the succeeding time code. Position identifiers, P_0 and P_1 through P_9 , occur every 10th bit, 0.1 ms before the leading edge of each succeeding 1 k pps on-time bit (see figure 6).

5.5.2 The time code word and the control functions presented during the time frame are pulse width coded. The binary zero and index markers have durations of 20 μ s, and the binary one has a duration of 50 μ s. The 10 k pps leading edge is the on-time reference point for all bits.

5.5.3 The BCD time-of-year code word consists of 38 bits beginning at index count one. The subword bits occur between position identifiers P_0 and P_6 : 7 for seconds, 7 for minutes, 6 for hours, 10 for days, 4 for tenths of seconds, and 4 for hundredths of seconds to complete the time code word. An index marker occurs between the decimal digits in each subword, except for fractional seconds, to provide visual separation. The LSB occurs first, except for the fractional second information which follows the day-of-year information. The code recycles yearly. Each bit position is identified in table 6.

5.5.4 Thirty-six control bits occur between position identifiers P_6 and P_0 . Any control function bit or combination of bits can be programmed to read a binary one or zero during any specified number of time frames. Each control bit position is identified in table 6.

5.5.5

Pulse Rate	Pulse Duration
Bit rate: 10 k pps Position identifier: 1 k pps Reference marker: 100 pps	Index marker: 20 μ s Binary zero or uncoded bit: 20 μ s Binary one or coded bit: 50 μ s Position identifiers: 80 μ s Reference bit: 80 μ s

Resolution	Mark-To-Space Ratio
0.1 ms dc level 10 μ s modulated 100 kHz	Nominal value of 10:3 Range of 3:1 to 6:1 carrier

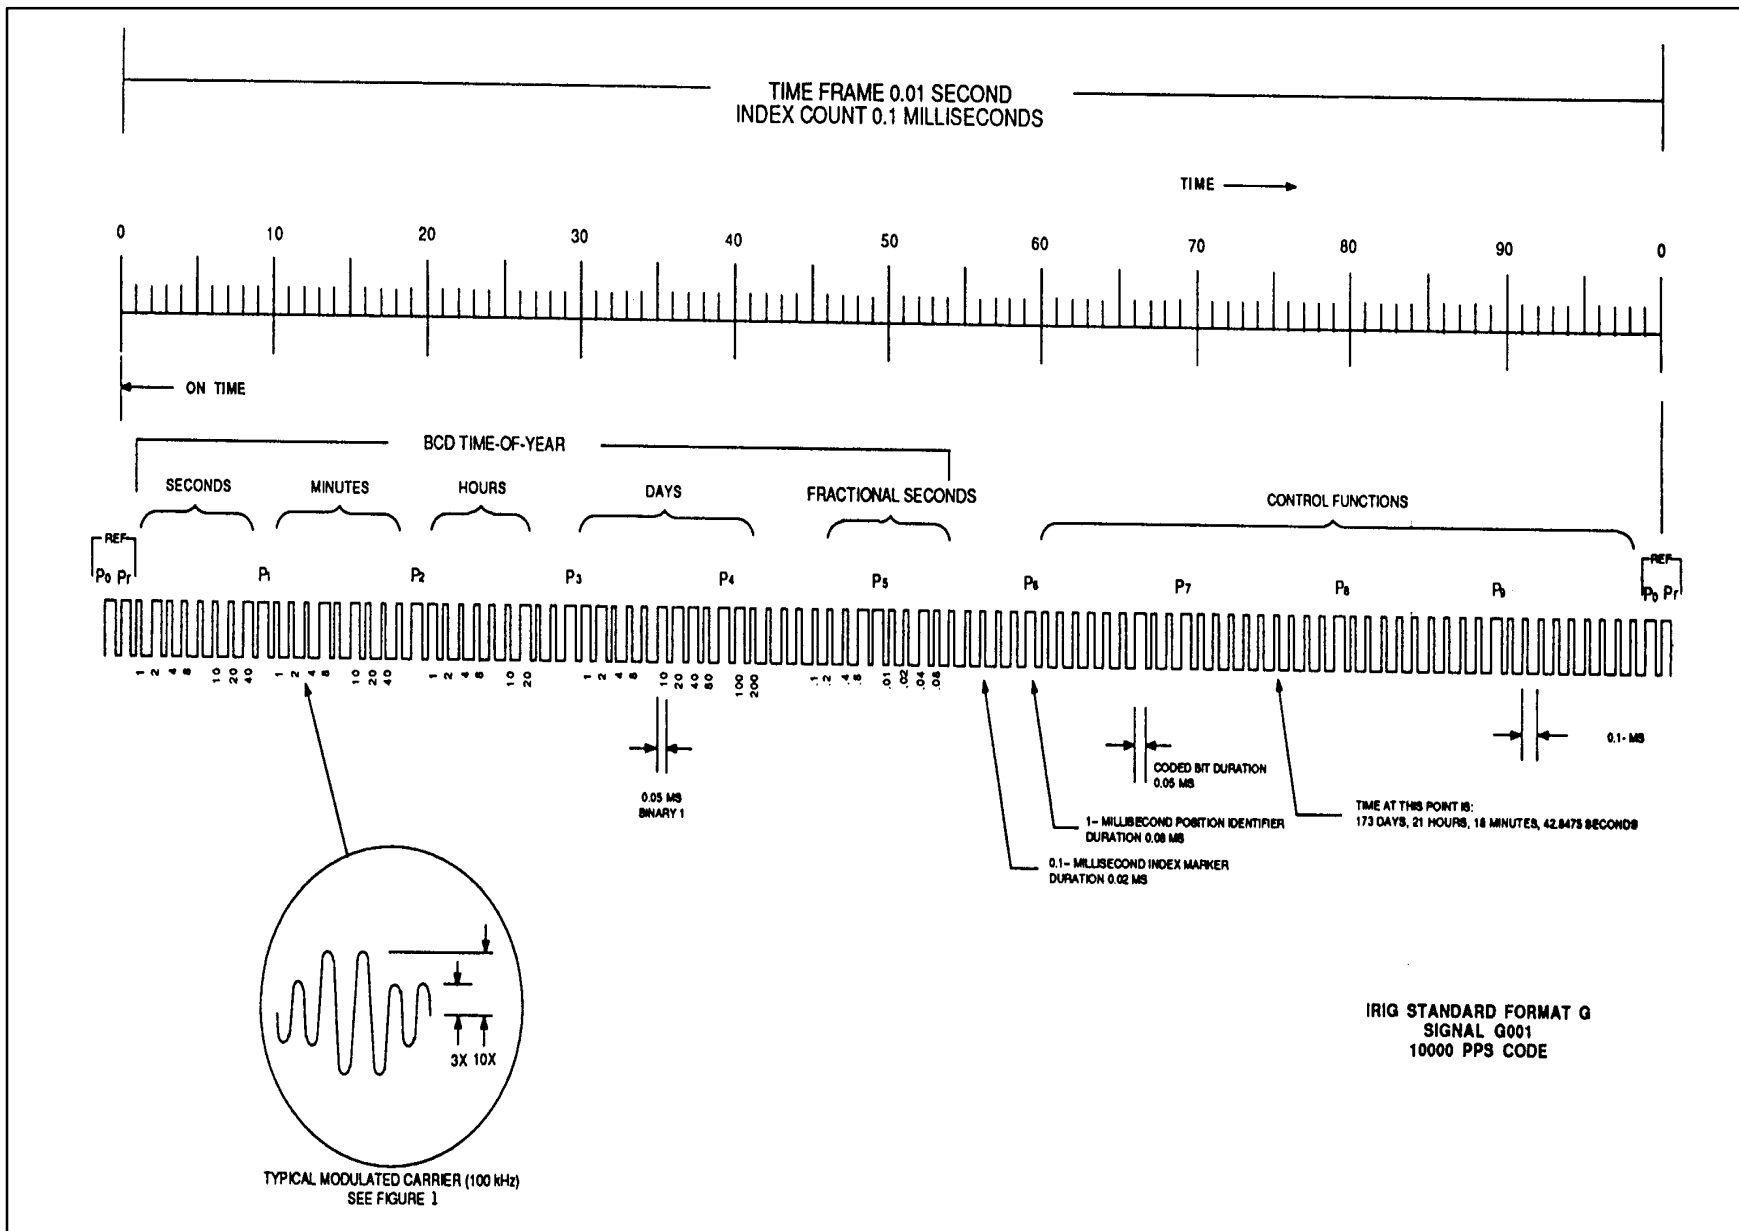


Figure 6. Format G: BCD time-of-year in days, hours, minutes, seconds, and fractions of seconds plus optional control bits.

TABLE 6. FORMAT G, SIGNAL G001

BCD TIME-OF-YEAR CODE (38 DIGITS)

SECONDS SUBWORD			MINUTES SUBWORD			HOURS SUBWORD			DAYS AND FRACTIONAL SECOND SUBWORD					
BCD Code Digit No.	Subword Digit Wt SECONDS	BIT Time (Note 1)	BCD Code Digit No.	Subword Digit Wt MINUTES	BIT Time	BCD Code Digit No.	Subword Digit Wt HOURS	BIT Time	BCD Code Digit No.	Subword Digit Wt DAYS	BIT Time	BCD Code Digit No.	Subword Digit Wt DAYS	BIT Time
Reference BIT		P _r	8	1	P _r + 1.0 ms	15	1	P _r + 2.0 ms	21	1	P _r + 3.0 ms	29	100	P _r + 4.0 ms
1	1	P _r + 0.1 ms	9	2	P _r + 1.1 ms	16	2	P _r + 2.1 ms	22	2	P _r + 3.1 ms	30	200	P _r + 4.1 ms
2	2	P _r + 0.2 ms	10	4	P _r + 1.2 ms	17	4	P _r + 2.2 ms	23	4	P _r + 3.2 ms	Index BIT		P _r + 4.2 ms
3	4	P _r + 0.3 ms	11	8	P _r + 1.3 ms	18	8	P _r + 2.3 ms	24	8	P _r + 3.3 ms	Index BIT		P _r + 4.3 ms
4	8	P _r + 0.4 ms	Index BIT		P _r + 1.4 ms	Index BIT		P _r + 2.4 ms	Index BIT		P _r + 3.4 ms	Index BIT		P _r + 4.4 ms
Index Bit		P _r + 0.5 ms	12	10	P _r + 1.5 ms	19	10	P _r + 2.5 ms	25	10	P _r + 3.5 ms	31	0.1	P _r + 4.5 ms
5	10	P _r + 0.6 ms	13	20	P _r + 1.6 ms	20	20	P _r + 2.6 ms	26	20	P _r + 3.6 ms	32	0.2	P _r + 4.6 ms
6	20	P _r + 0.7 ms	14	40	P _r + 1.7 ms	Index BIT		P _r + 2.7 ms	27	40	P _r + 3.7 ms	33	0.4	P _r + 4.7 ms
7	40	P _r + 0.8 ms	Index BIT		P _r + 1.8 ms	Index BIT		P _r + 2.8 ms	28	80	P _r + 3.8 ms	34	0.8	P _r + 4.8 ms
Position Ident. (P ₁)		P _r + 0.9 ms	Position Ident. (P ₂)		P _r + 1.9 ms	Position Ident. (P ₃)		P _r + 2.9 ms	Position Ident. (P ₄)		P _r + 3.9 ms	Position Ident. (P ₅)		P _r + 4.9 ms

BCD TIME-OF-YEAR CODE (Cont'd)

FRACTIONAL SECOND SUB-WORD

BCD Code Digit No.	Subword Digit Wt SECONDS	BIT Time
35	0.01	P _r + 5.0 ms
36	0.02	P _r + 5.1 ms
37	0.04	P _r + 5.2 ms
38	0.08	P _r + 5.3 ms
Index BIT		P _r + 5.4 ms
Index BIT		P _r + 5.5 ms
Index BIT		P _r + 5.6 ms
Index BIT		P _r + 5.7 ms
Index BIT		P _r + 5.8 ms
Position Ident. (P ₆)		P _r + 5.9 ms

CONTROL FUNCTIONS (36 BITS)

Control Function BIT	BIT Time	Control Function BIT	BIT Time	Control Function BIT	BIT Time	Control Function BIT	BIT Time
1	P _r + 6.0 ms	10	P _r + 7.0 ms	19	P _r + 8.0 ms	28	P _r + 9.0 ms
2	P _r + 6.1 ms	11	P _r + 7.1 ms	20	P _r + 8.1 ms	29	P _r + 9.1 ms
3	P _r + 6.2 ms	12	P _r + 7.2 ms	21	P _r + 8.2 ms	30	P _r + 9.2 ms
4	P _r + 6.3 ms	13	P _r + 7.3 ms	22	P _r + 8.3 ms	31	P _r + 9.3 ms
5	P _r + 6.4 ms	14	P _r + 7.4 ms	23	P _r + 8.4 ms	32	P _r + 9.4 ms
6	P _r + 6.5 ms	15	P _r + 7.5 ms	24	P _r + 8.5 ms	33	P _r + 9.5 ms
7	P _r + 6.6 ms	16	P _r + 7.6 ms	25	P _r + 8.6 ms	34	P _r + 9.6 ms
8	P _r + 6.7 ms	17	P _r + 7.7 ms	26	P _r + 8.7 ms	35	P _r + 9.7 ms
9	P _r + 6.8 ms	18	P _r + 7.8 ms	27	P _r + 8.8 ms	36	P _r + 9.8 ms
Position Ident. (P ₇)	P _r + 6.9 ms	Position Ident. (P ₈)	P _r + 7.9 ms	Position Ident. (P ₉)	P _r + 8.9 ms	Position Ident. (P ₀)	P _r + 9.9 ms

5.6 Format H, Signal H001

5.6.1 The beginning of each 1-minute time frame is identified by two consecutive 0.8 second bits, P_0 and P_r . The leading edge of P_r is the on-time reference point for the succeeding time code. Position identifiers P_0 and P_1 through P_5 , occur every 10th bit one second before the leading edge of each succeeding 6 ppm on-time bit (see figure 7).

5.6.2 The time code word and the control functions presented during the time frame are pulse width coded. The binary zero and the index markers have a duration of 0.2 seconds, and a binary one has a duration of 0.5 seconds. The leading edge is the 1 pps on-time reference point for all bits.

5.6.3 The BCD time-of-year consists of 23 bits beginning at index count 10. The subword bits occur between position identifiers P_0 and P_5 : 7 for minutes, 6 for hours, and 10 for days to complete the time code word. An index marker occurs between the decimal digits in each subword to provide separation for visual resolution. The LSB occurs first. The code recycles yearly. Each bit position is identified in table 7.

5.6.4 Nine control functions occur between position identifiers P_5 and P_0 . Any control function bit or combination of bits can be programmed to read a binary one or zero during any specified number of time frames. Each control function position is identified in table 7.

5.6.5

Pulse Rate	Pulse Duration
Bit rate: 1 pps Position identifier: 6 ppm Reference marker: 1 ppm	Index marker: 0.2 s Binary zero or uncoded bit: 0.2 s Binary one or coded bit: 0.5 s Position identifiers: 0.8 s Reference bit: 0.8 s

Resolution	Mark-To-Space Ratio
1 s dc level 10 ms modulated 100 Hz carrier 1 ms modulated 1 kHz carrier	Nominal value of 10:3 Range of 3:1 to 6:1

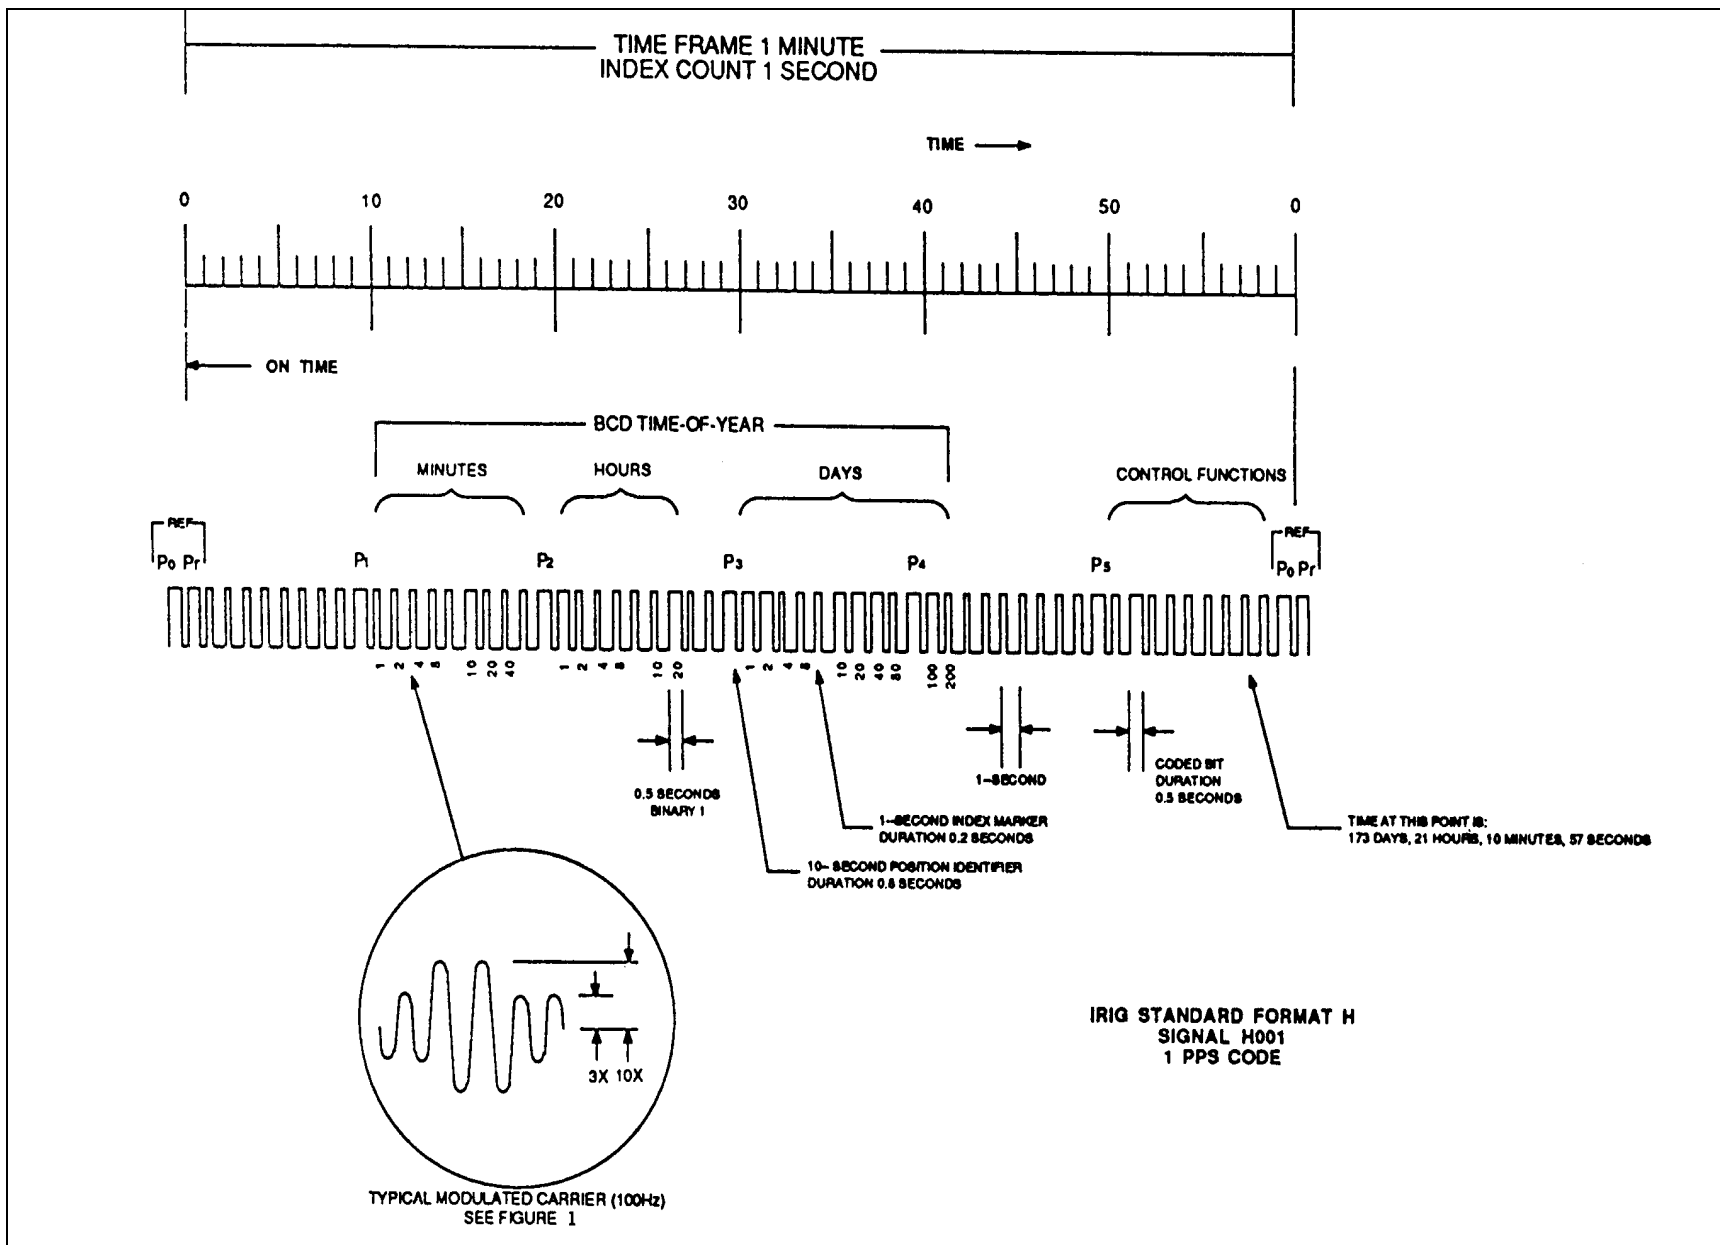


Figure 7. Format H: BCD time-of-year in days, hours and minutes plus optional control bits.

TABLE 7. FORMAT H, SIGNAL H001

BCD TIME-OF-YEAR CODE (23 DIGITS)

			MINUTES SUBWORD			HOURS SUBWORD			DAYS SUBWORD					
BCD Code Digit No.	Subword Digit Wt SECONDS	BIT Time (Note 1)	BCD Code Digit No.	Subword Digit Wt MINUTES	BIT Time	BCD Code Digit No.	Subword Digit Wt HOURS	BIT Time	BCD Code Digit No.	Subword Digit Wt DAYS	BIT Time	BCD Code Digit No.	Subword Digit Wt DAYS	BIT Time
Reference BIT		P_r	1	1	$P_r + 10$ sec	8	1	$P_r + 20$ sec	14	1	$P_r + 30$ sec	22	100	$P_r + 40$ sec
Index Marker		$P_r + 1$ sec	2	2	$P_r + 11$ sec	9	2	$P_r + 21$ sec	15	2	$P_r + 31$ sec	33	200	$P_r + 41$ sec
Index Marker		$P_r + 2$ sec	3	4	$P_r + 12$ sec	10	4	$P_r + 22$ sec	16	4	$P_r + 32$ sec	Index Marker		$P_r + 42$ sec
Index Marker		$P_r + 3$ sec	4	8	$P_r + 13$ sec	11	8	$P_r + 23$ sec	17	8	$P_r + 33$ sec	Index Marker		$P_r + 43$ sec
Index Marker		$P_r + 4$ sec	Index Marker		$P_r + 14$ sec	Index Marker		$P_r + 24$ sec	Index Marker		$P_r + 34$ sec	Index Marker		$P_r + 44$ sec
Index Marker		$P_r + 5$ sec	5	10	$P_r + 15$ sec	12	10	$P_r + 25$ sec	18	10	$P_r + 35$ sec	Index Marker		$P_r + 45$ sec
Index Marker		$P_r + 6$ sec	6	20	$P_r + 16$ sec	13	20	$P_r + 26$ sec	19	20	$P_r + 36$ sec	Index Marker		$P_r + 46$ sec
Index Marker		$P_r + 7$ sec	7	40	$P_r + 17$ sec	Index Marker		$P_r + 27$ sec	20	40	$P_r + 37$ sec	Index Marker		$P_r + 47$ sec
Index Marker		$P_r + 8$ sec	Index Marker		$P_r + 18$ sec	Index Marker		$P_r + 28$ sec	21	80	$P_r + 38$ sec	Index Marker		$P_r + 48$ sec
Position Ident. (P_1)		$P_r + 9$ sec	Position Ident. (P_2)		$P_r + 19$ sec	Position Ident. (P_3)		$P_r + 29$ sec	Position Ident. (P_4)		$P_r + 39$ sec	Position Ident. (P_5)		$P_r + 49$ sec

CONTROL FUNCTIONS (9 BITS)

Control Function BIT	BIT Time
1	$P_r + 50$ sec
2	$P_r + 51$ sec
3	$P_r + 52$ sec
4	$P_r + 53$ sec
5	$P_r + 54$ sec
6	$P_r + 55$ sec
7	$P_r + 56$ sec
8	$P_r + 57$ sec
9	$P_r + 58$ sec
Position Ident. (P_0)	$P_r + 59$ sec

Note 1: The BIT Time is the time of the BIT leading edge and refers to the leading edge of P_r .